



OMEC NORTH AMERICA INC

ALUMINIUM - GENERAL PURPOSE MOTORS

PRODUCT FEATURES



Model Number	OMT4-80M00-2 1.1KW		
Standard	IEC 60034-1	Output	1.10 KW
Hazardous Classification	None (Safe Area)	No of Poles	2 Pole
Efficiency Class	IE3	Frame Size	80M
Number of Phases	3 Phase- Induction	Mounting Type	B3; B35, B14, B5, V1
Material of Construction	Aluminium	Enclosure Type / Cooling	TEFC-IC411
Insulation Class	Class F	Degree of Protection	IP55
Temperature Rise Class	80K (B class)	Duty Cycle	S1- Continuous Duty
Ambient Temperature	-15°C ~ 50°C	Service Factor	SF 1.15
Starting Method	DOL / WYE-DELTA	Operating Altitude	1000 masl

TECHNICAL DETAILS

Winding Connection	Y (Star)						
Frequency	50Hz			60Hz			
Rated Speed	2875 Rpm			3450 Rpm			
Voltage	380	400	415	380	400	440	460
Full Load Current [IN]	2.43 A	2.31 A	2.23 A	2.43 A	2.31 A	2.10 A	2.01 A
Locked Rotor Current [IL / IN]	6.8	6.8	6.8	6.8	6.8	6.8	6.8
Full Load Torque [TN]	3.65 Nm	3.65 Nm	3.65 Nm	3.04 Nm	3.04 Nm	3.04 Nm	3.04 Nm
Locked Rotor Torque [TL / TN]	2.2	2.2	2.2	2.6	2.6	2.6	2.6
Breakdown Torque [TB / TN]	2.3	2.3	2.3	2.8	2.8	2.8	2.8
Efficiency	50% load	75.0%	75.0%	75.0%	75.0%	75.0%	75.0%
	75% load	82.5%	82.5%	82.5%	82.5%	82.5%	82.5%
	100% load	82.7%	82.7%	82.7%	82.7%	82.7%	82.7%
Power Factor (cos φ)	50% load	0.67	0.67	0.67	0.67	0.67	0.67
	75% load	0.77	0.77	0.77	0.77	0.77	0.77
	100% load	0.83	0.83	0.83	0.83	0.83	0.83

OTHER DETAILS

Bearing Configuration (DE / NDE)	Ball Bearing / Ball Bearing			
Bearing Lubrication Type	Grease - Mobil Polyrex EM			
Bearing Series Type	DE:	6204-2Z/C3	NDE:	6204-2Z/C3
Vibration	1.6 mm/sec	Direction of Rotation	CW or CCW	
Moment of inertia (kg.m ²)	0.0019	Sound Pressure Level	67 dB(A)	
Final Colour	RAL-7031 : BLUE GREY	Paint Specification	2 Pack Epoxy	
Terminal Box Position	TOP/SIDE	Weight	11 kg	

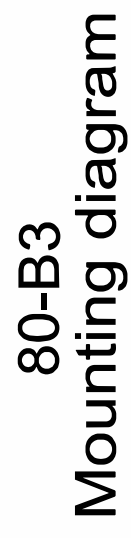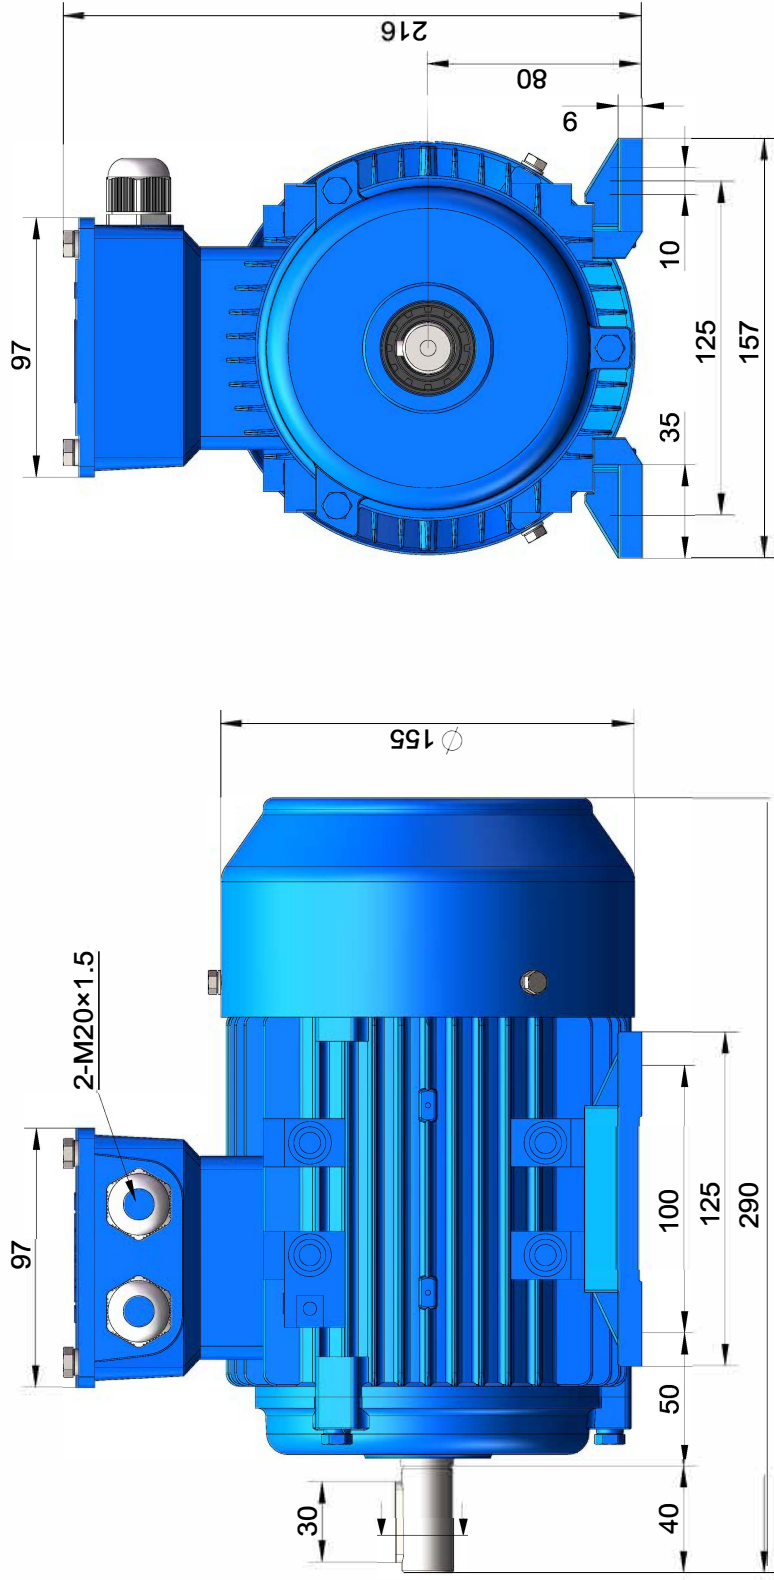



OMEC NORTH AMERICA INC.

Performance Curves

kW: 1.1 RPM: 2875

IE3 GENERAL PURPOSE MOTORS- OMT 400V 50Hz

