



# OMEC NORTH AMERICA INC

ALUMINIUM - GENERAL PURPOSE MOTORS

## PRODUCT FEATURES

|                          |                    |                          |                      |
|--------------------------|--------------------|--------------------------|----------------------|
| Model Number             | OMT4-112M00-2 4KW  |                          |                      |
| Standard                 | IEC 60034-1        | Output                   | 4.00 KW              |
| Hazardous Classification | None (Safe Area)   | No of Poles              | 2 Pole               |
| Efficiency Class         | IE3                | Frame Size               | 112M                 |
| Number of Phases         | 3 Phase- Induction | Mounting Type            | B3; B35, B14, B5, V1 |
| Material of Construction | Aluminium          | Enclosure Type / Cooling | TEFC-IC411           |
| Insulation Class         | Class F            | Degree of Protection     | IP55                 |
| Temperature Rise Class   | 80K (B class)      | Duty Cycle               | S1- Continuous Duty  |
| Ambient Temperature      | -15°C ~ 50°C       | Service Factor           | SF 1.15              |
| Starting Method          | DOL / WYE-DELTA    | Operating Altitude       | 1000 masl            |


## TECHNICAL DETAILS

|                                  |                  |          |          |          |          |          |          |
|----------------------------------|------------------|----------|----------|----------|----------|----------|----------|
| Winding Connection               | $\Delta$ (Delta) |          |          |          |          |          |          |
| Frequency                        | 50Hz             |          |          | 60Hz     |          |          |          |
| Rated Speed                      | 2915 Rpm         |          |          | 3495 Rpm |          |          |          |
| Voltage                          | 380              | 400      | 415      | 380      | 400      | 440      | 460      |
| Full Load Current [ IN ]         | 7.84 A           | 7.45 A   | 7.18 A   | 7.84 A   | 7.45 A   | 6.77 A   | 6.48 A   |
| Locked Rotor Current [ IL / IN ] | 8.3              | 8.3      | 8.3      | 8.3      | 8.3      | 8.3      | 8.3      |
| Full Load Torque [ TN ]          | 13.10 Nm         | 13.10 Nm | 13.10 Nm | 10.93 Nm | 10.93 Nm | 10.93 Nm | 10.93 Nm |
| Locked Rotor Torque [ TL / TN ]  | 2.2              | 2.2      | 2.2      | 2.6      | 2.6      | 2.6      | 2.6      |
| Breakdown Torque [ TB / TN ]     | 2.3              | 2.3      | 2.3      | 2.8      | 2.8      | 2.8      | 2.8      |
| Efficiency                       | 50% load         | 86.0%    | 86.0%    | 86.0%    | 86.0%    | 86.0%    | 86.0%    |
|                                  | 75% load         | 88.0%    | 88.0%    | 88.0%    | 88.0%    | 88.0%    | 88.0%    |
|                                  | 100% load        | 88.1%    | 88.1%    | 88.1%    | 88.1%    | 88.1%    | 88.1%    |
| Power Factor (cos $\phi$ )       | 50% load         | 0.72     | 0.72     | 0.72     | 0.72     | 0.72     | 0.72     |
|                                  | 75% load         | 0.83     | 0.83     | 0.83     | 0.83     | 0.83     | 0.83     |
|                                  | 100% load        | 0.88     | 0.88     | 0.88     | 0.88     | 0.88     | 0.88     |

## OTHER DETAILS

|                                        |                             |                       |                 |
|----------------------------------------|-----------------------------|-----------------------|-----------------|
| Bearing Configuration (DE / NDE)       | Ball Bearing / Ball Bearing |                       |                 |
| Bearing Lubrication Type               | Grease - Mobil Polyrex EM   |                       |                 |
| Bearing Series Type                    | DE:                         | 6306-2Z/C3            | NDE: 6306-2Z/C3 |
| Vibration                              | 1.6 mm/sec                  | Direction of Rotation | CW or CCW       |
| Moment of inertia (kg.m <sup>2</sup> ) | 0.0082                      | Sound Pressure Level  | 83 dB(A)        |
| Final Colour                           | RAL-7031 : BLUE GREY        | Paint Specification   | 2 Pack Epoxy    |
| Terminal Box Position                  | TOP/SIDE                    | Weight                | 28 kg           |

# 112M-B3 Mounting diagram

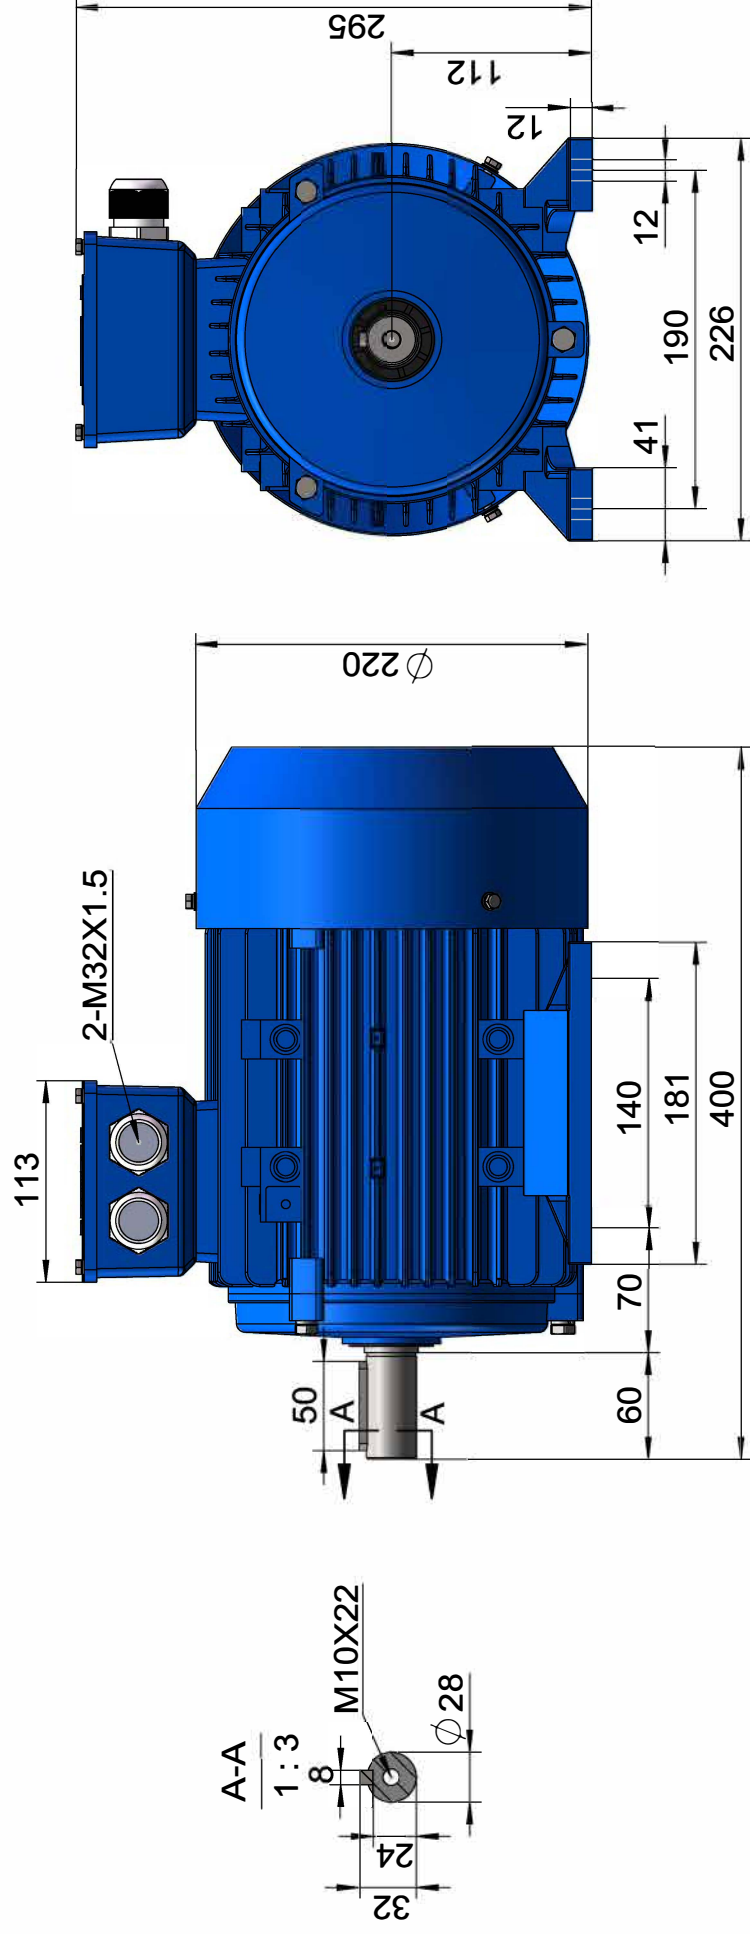



## OMEC NORTH AMERICA INC.

### Performance Curves

kW: 4 RPM: 2915

IE3 GENERAL PURPOSE MOTORS- OMT 400V 50Hz

