



OMEC NORTH AMERICA INC

ALUMINIUM - GENERAL PURPOSE MOTORS

PRODUCT FEATURES

Model Number	OMT4-112M00-4 4KW		
Standard	IEC 60034-1	Output	4.00 KW
Hazardous Classification	None (Safe Area)	No of Poles	4 Pole
Efficiency Class	IE3	Frame Size	112M
Number of Phases	3 Phase- Induction	Mounting Type	B3; B35, B14, B5, V1
Material of Construction	Aluminium	Enclosure Type / Cooling	TEFC-IC411
Insulation Class	Class F	Degree of Protection	IP55
Temperature Rise Class	80K (B class)	Duty Cycle	S1- Continuous Duty
Ambient Temperature	-15°C ~ 50°C	Service Factor	SF 1.15
Starting Method	DOL / WYE-DELTA	Operating Altitude	1000 masl


TECHNICAL DETAILS

Winding Connection	Δ (Delta)						
Frequency	50Hz			60Hz			
Rated Speed	1455 Rpm			1745 Rpm			
Voltage	380	400	415	380	400	440	460
Full Load Current [IN]	8.37 A	7.95 A	7.66 A	8.37 A	7.95 A	7.22 A	6.91 A
Locked Rotor Current [IL / IN]	7.8	7.8	7.8	7.8	7.8	7.8	7.8
Full Load Torque [TN]	26.25 Nm	26.25 Nm	26.25 Nm	21.89 Nm	21.89 Nm	21.89 Nm	21.89 Nm
Locked Rotor Torque [TL / TN]	2.2	2.2	2.2	2.6	2.6	2.6	2.6
Breakdown Torque [TB / TN]	2.3	2.3	2.3	2.8	2.8	2.8	2.8
Efficiency	50% load	86.6%	86.6%	86.6%	86.6%	86.6%	86.6%
	75% load	88.5%	88.5%	88.5%	88.5%	88.5%	88.5%
	100% load	88.6%	88.6%	88.6%	88.6%	88.6%	88.6%
Power Factor (cos φ)	50% load	0.64	0.64	0.64	0.64	0.64	0.64
	75% load	0.76	0.76	0.76	0.76	0.76	0.76
	100% load	0.82	0.82	0.82	0.82	0.82	0.82

OTHER DETAILS

Bearing Configuration (DE / NDE)	Ball Bearing / Ball Bearing		
Bearing Lubrication Type	Grease - ESSO UNIREX N2		
Bearing Series Type	DE:	6306-2Z/C3	NDE: 6306-2Z/C3
Vibration	1.6 mm/sec	Direction of Rotation	CW or CCW
Moment of inertia (kg.m ²)	0.0192	Sound Pressure Level	72 dB(A)
Final Colour	RAL-7031 : BLUE GREY	Paint Specification	2 Pack Epoxy
Terminal Box Position	TOP/SIDE	Weight	29 kg

112M-B3 Mounting diagram

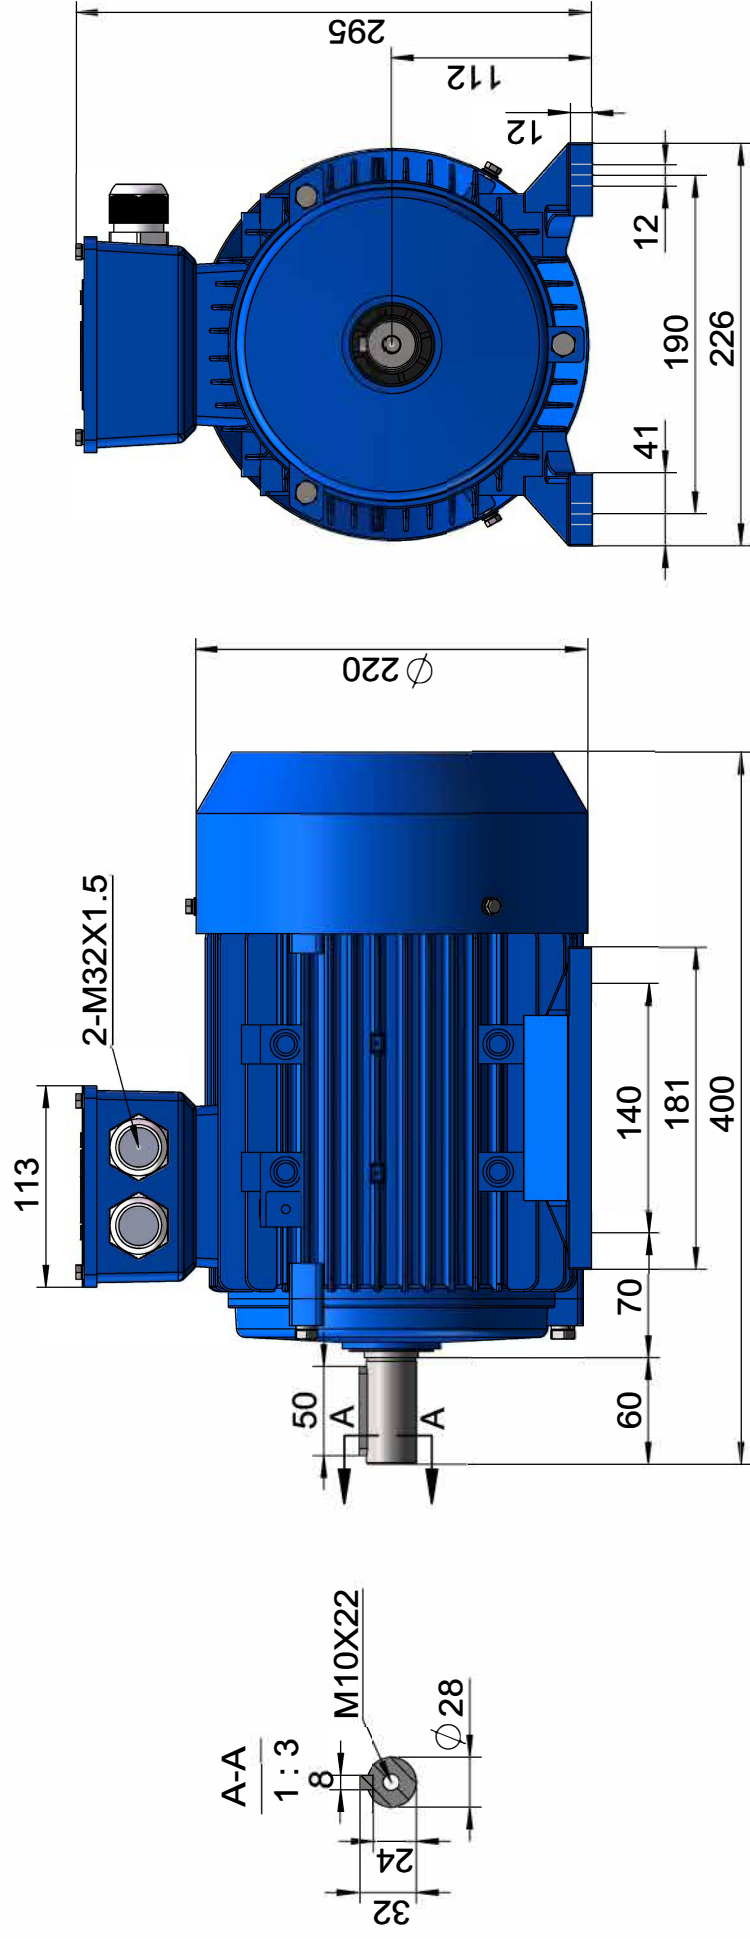



OMEC NORTH AMERICA INC.

Performance Curves

kW: 4 RPM: 1455

IE3 GENERAL PURPOSE MOTORS- **OMT** 400V 50Hz

