



OMEC NORTH AMERICA INC

ALUMINIUM - GENERAL PURPOSE MOTORS

PRODUCT FEATURES


Model Number	OMT4-132S00-4 5.5KW		
Standard	IEC 60034-1	Output	5.50 KW
Hazardous Classification	None (Safe Area)	No of Poles	4 Pole
Efficiency Class	IE3	Frame Size	132S
Number of Phases	3 Phase- Induction	Mounting Type	B3; B35, B14, B5, V1
Material of Construction	Aluminium	Enclosure Type / Cooling	TEFC-IC411
Insulation Class	Class F	Degree of Protection	IP55
Temperature Rise Class	80K (B class)	Duty Cycle	S1- Continuous Duty
Ambient Temperature	-15°C ~ 50°C	Service Factor	SF 1.15
Starting Method	DOL / WYE-DELTA	Operating Altitude	1000 masl

TECHNICAL DETAILS

Winding Connection	Δ (Delta)						
Frequency	50Hz			60Hz			
Rated Speed	1465 Rpm			1755 Rpm			
Voltage	380	400	415	380	400	440	460
Full Load Current [IN]	11.24 A	10.68 A	10.29 A	11.24 A	10.68 A	9.70 A	9.28 A
Locked Rotor Current [IL / IN]	7.9	7.9	7.9	7.9	7.9	7.9	7.9
Full Load Torque [TN]	35.85 Nm	35.85 Nm	35.85 Nm	29.93 Nm	29.93 Nm	29.93 Nm	29.93 Nm
Locked Rotor Torque [TL / TN]	2.0	2.0	2.0	2.4	2.4	2.4	2.4
Breakdown Torque [TB / TN]	2.3	2.3	2.3	2.8	2.8	2.8	2.8
Efficiency	50% load	88.6%	88.6%	88.6%	88.6%	88.6%	88.6%
	75% load	89.5%	89.5%	89.5%	89.5%	89.5%	89.5%
	100% load	89.6%	89.6%	89.6%	89.6%	89.6%	89.6%
Power Factor (cos φ)	50% load	0.65	0.65	0.65	0.65	0.65	0.65
	75% load	0.77	0.77	0.77	0.77	0.77	0.77
	100% load	0.83	0.83	0.83	0.83	0.83	0.83

OTHER DETAILS

Bearing Configuration (DE / NDE)	Ball Bearing / Ball Bearing		
Bearing Lubrication Type	Grease - ESSO UNIREX N2		
Bearing Series Type	DE:	6308-2Z/C3	NDE: 6308-2Z/C3
Vibration	1.6 mm/sec	Direction of Rotation	CW or CCW
Moment of inertia (kg.m ²)	0.0382	Sound Pressure Level	75 dB(A)
Final Colour	RAL-7031 : BLUE GREY	Paint Specification	2 Pack Epoxy
Terminal Box Position	TOP/SIDE	Weight	43 kg

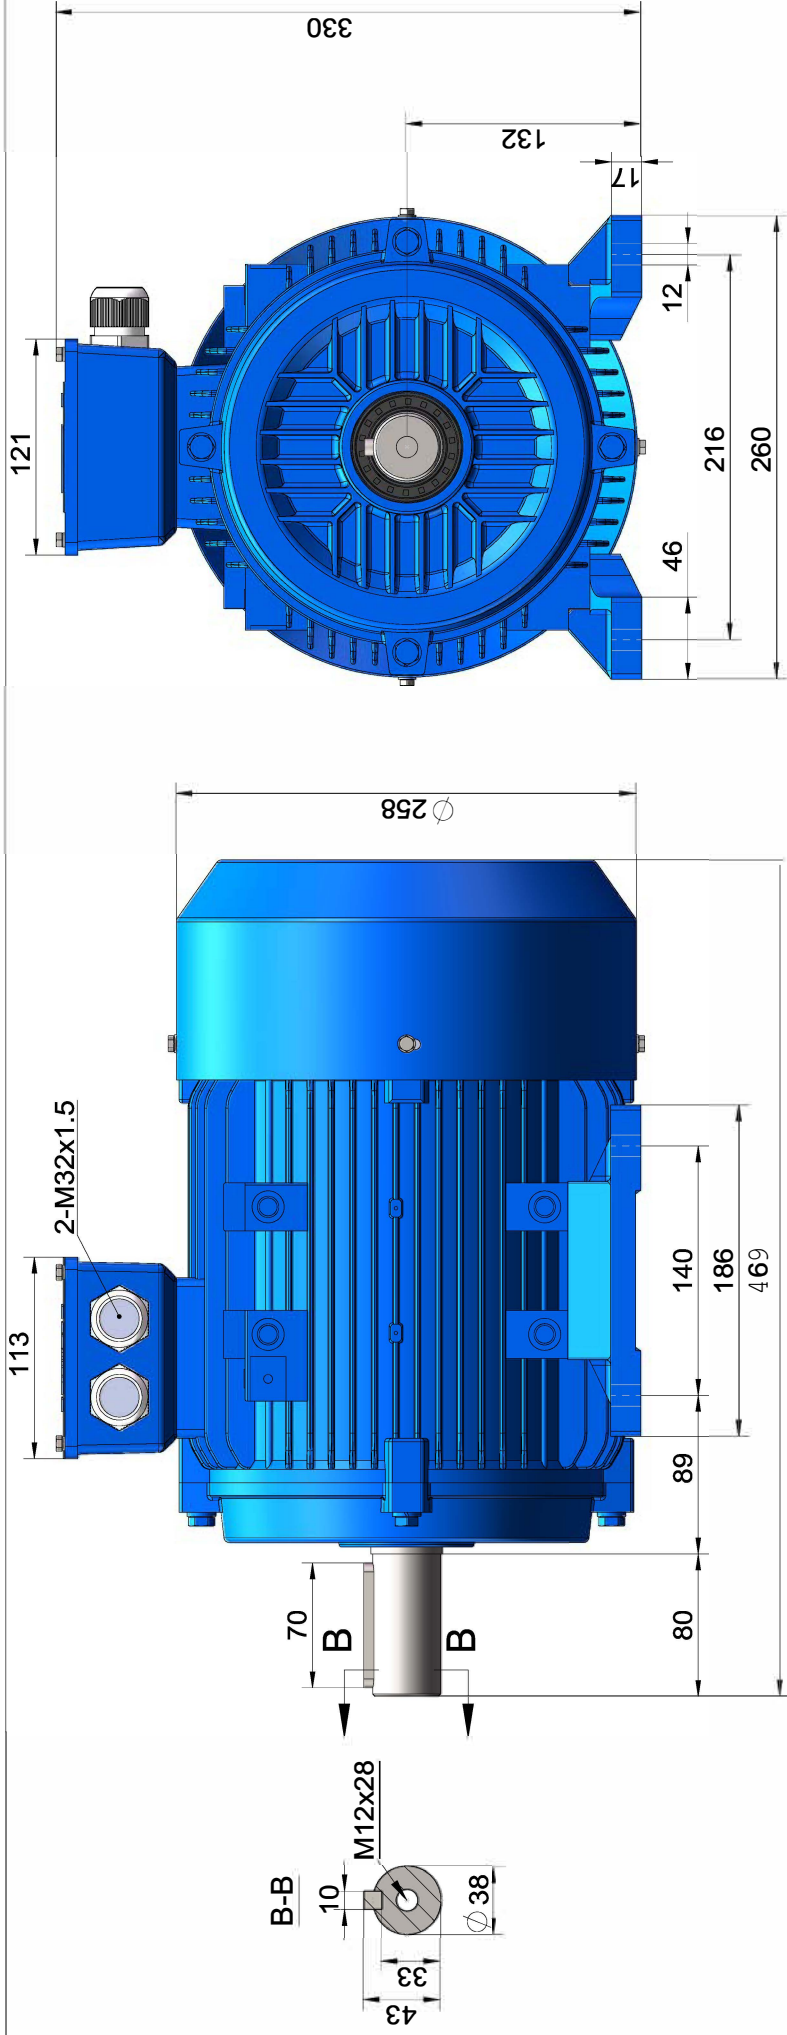



OMEC NORTH AMERICA INC.

Performance Curves

kW: 5.5 RPM: 1465

IE3 GENERAL PURPOSE MOTORS- OMT 400V 50Hz

