



OMEC NORTH AMERICA INC

ALUMINIUM - GENERAL PURPOSE MOTORS

PRODUCT FEATURES


Model Number	OMT4-132S00-2 7.5KW		
Standard	IEC 60034-1	Output	7.50 KW
Hazardous Classification	None (Safe Area)	No of Poles	2 Pole
Efficiency Class	IE3	Frame Size	132S
Number of Phases	3 Phase- Induction	Mounting Type	B3; B35, B14, B5, V1
Material of Construction	Aluminium	Enclosure Type / Cooling	TEFC-IC411
Insulation Class	Class F	Degree of Protection	IP55
Temperature Rise Class	80K (B class)	Duty Cycle	S1- Continuous Duty
Ambient Temperature	-15°C ~ 50°C	Service Factor	SF 1.15
Starting Method	DOL / WYE-DELTA	Operating Altitude	1000 masl

TECHNICAL DETAILS

Winding Connection	Δ (Delta)						
Frequency	50Hz			60Hz			
Rated Speed	2930 Rpm			3515 Rpm			
Voltage	380	400	415	380	400	440	460
Full Load Current [IN]	14.21 A	13.50 A	13.01 A	14.21 A	13.50 A	12.27 A	11.74 A
Locked Rotor Current [IL / IN]	7.9	7.9	7.9	7.9	7.9	7.9	7.9
Full Load Torque [TN]	24.45 Nm	24.45 Nm	24.45 Nm	20.38 Nm	20.38 Nm	20.38 Nm	20.38 Nm
Locked Rotor Torque [TL / TN]	2.0	2.0	2.0	2.4	2.4	2.4	2.4
Breakdown Torque [TB / TN]	2.3	2.3	2.3	2.8	2.8	2.8	2.8
Efficiency	50% load	88.2%	88.2%	88.2%	88.2%	88.2%	88.2%
	75% load	90.0%	90.0%	90.0%	90.0%	90.0%	90.0%
	100% load	90.1%	90.1%	90.1%	90.1%	90.1%	90.1%
Power Factor (cos ϕ)	50% load	0.71	0.71	0.71	0.71	0.71	0.71
	75% load	0.83	0.83	0.83	0.83	0.83	0.83
	100% load	0.89	0.89	0.89	0.89	0.89	0.89

OTHER DETAILS

Bearing Configuration (DE / NDE)	Ball Bearing / Ball Bearing		
Bearing Lubrication Type	Grease - Mobil Polyrex EM		
Bearing Series Type	DE:	6308-2Z/C3	NDE: 6308-2Z/C3
Vibration	1.6 mm/sec	Direction of Rotation	CW or CCW
Moment of inertia (kg.m ²)	0.0195	Sound Pressure Level	85 dB(A)
Final Colour	RAL-7031 : BLUE GREY	Paint Specification	2 Pack Epoxy
Terminal Box Position	TOP/SIDE	Weight	43 kg

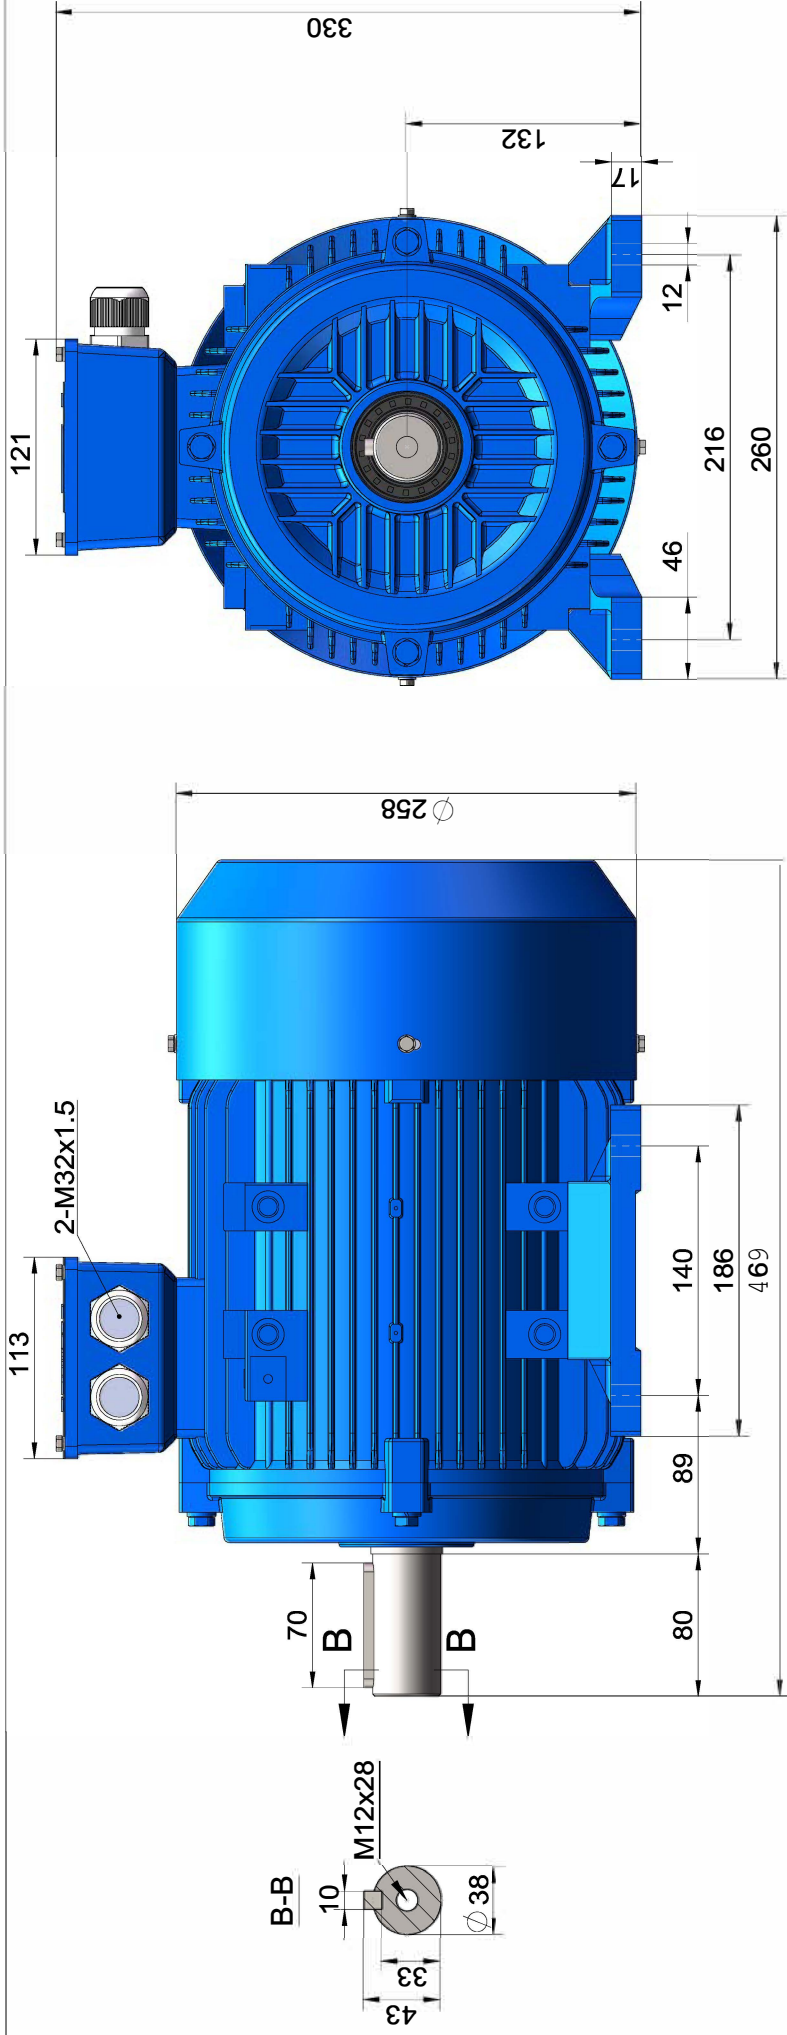



OMEC NORTH AMERICA INC.

Performance Curves

kW: 7.5 RPM: 2930

IE3 GENERAL PURPOSE MOTORS- OMT 400V 50Hz

