



OMEC NORTH AMERICA INC

CAST IRON - GENERAL PURPOSE MOTORS

PRODUCT FEATURES


Model Number	OMT3-132M00-4 7.5KW		
Standard	IEC 60034-1	Output	7.50 KW
Hazardous Classification	None (Safe Area)	No of Poles	4 Pole
Efficiency Class	IE3	Frame Size	132M
Number of Phases	3 Phase- Induction	Mounting Type	B3; B35, B14, B5, V1
Material of Construction	Cast Iron	Enclosure Type / Cooling	TEFC-IC411
Insulation Class	Class F	Degree of Protection	IP55
Temperature Rise Class	80K (B class)	Duty Cycle	S1- Continuous Duty
Ambient Temperature	-15°C ~ 50°C	Service Factor	SF 1.15
Starting Method	DOL / WYE-DELTA	Operating Altitude	1000 masl

TECHNICAL DETAILS

Winding Connection	Δ (Delta)						
Frequency	50Hz			60Hz			
Rated Speed	1465 Rpm			1755 Rpm			
Voltage	380	400	415	380	400	440	460
Full Load Current [IN]	15.01 A	14.26 A	13.74 A	15.01 A	14.26 A	12.96 A	12.40 A
Locked Rotor Current [IL / IN]	7.5	7.5	7.5	7.5	7.5	7.5	7.5
Full Load Torque [TN]	48.89 Nm	48.89 Nm	48.89 Nm	40.81 Nm	40.81 Nm	40.81 Nm	40.81 Nm
Locked Rotor Torque [TL / TN]	2.0	2.0	2.0	2.4	2.4	2.4	2.4
Breakdown Torque [TB / TN]	2.3	2.3	2.3	2.8	2.8	2.8	2.8
Efficiency	50% load	89.7%	89.7%	89.7%	89.7%	89.7%	89.7%
	75% load	90.3%	90.3%	90.3%	90.3%	90.3%	90.3%
	100% load	90.4%	90.4%	90.4%	90.4%	90.4%	90.4%
Power Factor (cos φ)	50% load	0.69	0.69	0.69	0.69	0.69	0.69
	75% load	0.79	0.79	0.79	0.79	0.79	0.79
	100% load	0.84	0.84	0.84	0.84	0.84	0.84

OTHER DETAILS

Bearing Configuration (DE / NDE)	Ball Bearing / Ball Bearing		
Bearing Lubrication Type	Grease - ESSO UNIREX N2		
Bearing Series Type	DE:	6208-2Z/C3	NDE: 6208-2Z/C3
Vibration	1.6 mm/sec	Direction of Rotation	CW or CCW
Moment of inertia (kg.m ²)	0.0488	Sound Pressure Level	75 dB(A)
Final Colour	RAL-5012 : BLUE	Paint Specification	2 Pack Epoxy
Terminal Box Position	TOP/SIDE	Weight	80 kg

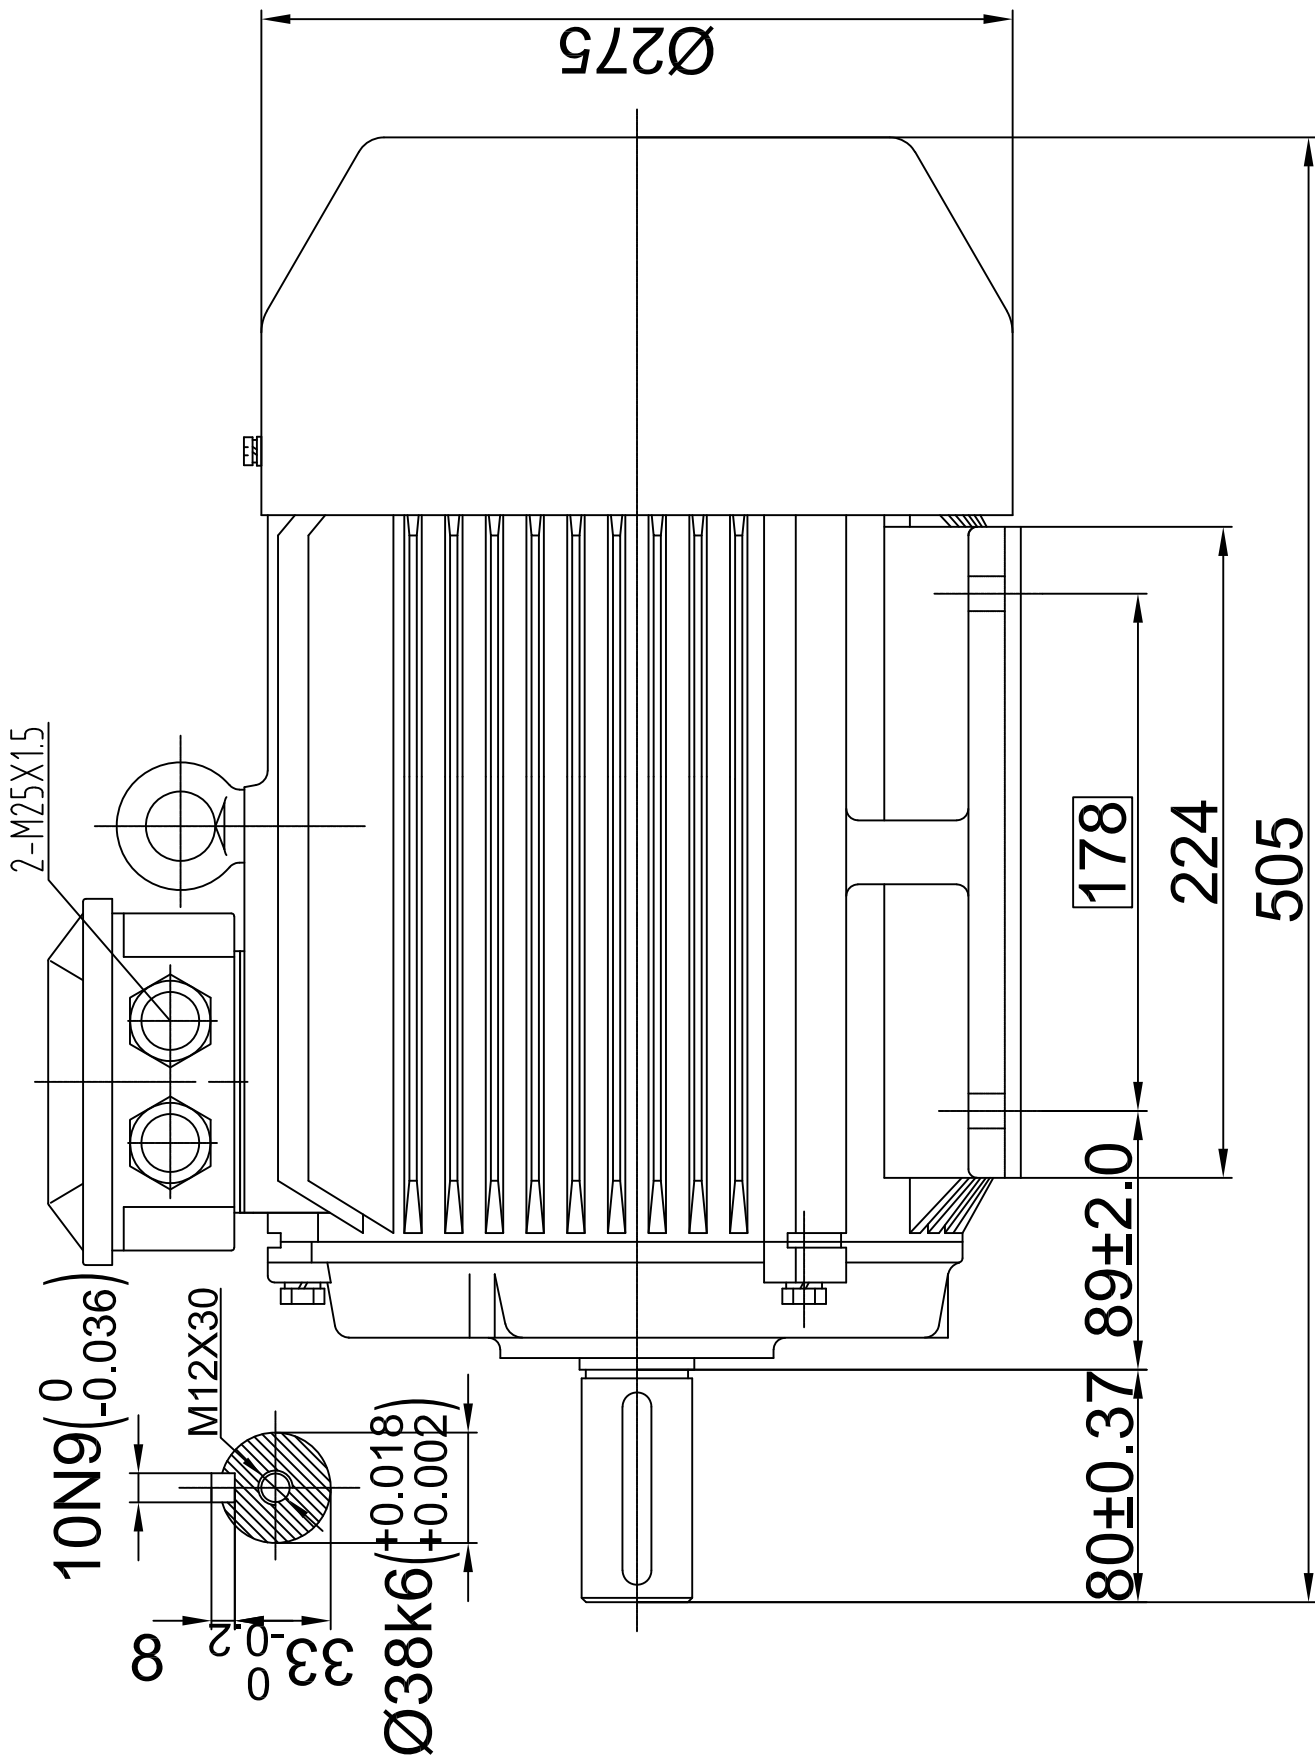

IP55-Cast Iron B3 MOTORS

OMEC NORTH AMERICA INC.

Drawing Title:		Description: OMT3 Type-1	
Outline Drawing		Motor Frame: 132M	
Sheet No.	Dim. Size	Scale	
1 OF 1	mm A3	1:5	



A.J.B.	15.Jan.2025	00
Drawn By	Date	Approved By
		Rev.



OMEC NORTH AMERICA INC.

Performance Curves

kW: 7.5 RPM: 1465

IE3 GENERAL PURPOSE MOTORS- OMT 400V 50Hz

