



OMEC NORTH AMERICA INC

ALUMINIUM - GENERAL PURPOSE MOTORS

PRODUCT FEATURES


Model Number	OMT4-100L00-2 3KW		
Standard	IEC 60034-1	Output	3.00 KW
Hazardous Classification	None (Safe Area)	No of Poles	2 Pole
Efficiency Class	IE3	Frame Size	100L
Number of Phases	3 Phase- Induction	Mounting Type	B3; B35, B14, B5, V1
Material of Construction	Aluminium	Enclosure Type / Cooling	TEFC-IC411
Insulation Class	Class F	Degree of Protection	IP55
Temperature Rise Class	80K (B class)	Duty Cycle	S1- Continuous Duty
Ambient Temperature	-15°C ~ 50°C	Service Factor	SF 1.15
Starting Method	DOL / WYE-DELTA	Operating Altitude	1000 masl

TECHNICAL DETAILS

Winding Connection	Y (Star)						
Frequency	50Hz			60Hz			
Rated Speed	2880 Rpm			3455 Rpm			
Voltage	380	400	415	380	400	440	460
Full Load Current [IN]	6.02 A	5.71 A	5.51 A	6.02 A	5.71 A	5.19 A	4.97 A
Locked Rotor Current [IL / IN]	7.3	7.3	7.3	7.3	7.3	7.3	7.3
Full Load Torque [TN]	9.95 Nm	9.95 Nm	9.95 Nm	8.29 Nm	8.29 Nm	8.29 Nm	8.29 Nm
Locked Rotor Torque [TL / TN]	2.2	2.2	2.2	2.6	2.6	2.6	2.6
Breakdown Torque [TB / TN]	2.3	2.3	2.3	2.8	2.8	2.8	2.8
Efficiency	50% load	84.9%	84.9%	84.9%	84.9%	84.9%	84.9%
	75% load	87.0%	87.0%	87.0%	87.0%	87.0%	87.0%
	100% load	87.1%	87.1%	87.1%	87.1%	87.1%	87.1%
Power Factor (cos φ)	50% load	0.76	0.76	0.76	0.76	0.76	0.76
	75% load	0.83	0.83	0.83	0.83	0.83	0.83
	100% load	0.87	0.87	0.87	0.87	0.87	0.87

OTHER DETAILS

Bearing Configuration (DE / NDE)	Ball Bearing / Ball Bearing		
Bearing Lubrication Type	Grease - Mobil Polyrex EM		
Bearing Series Type	DE:	6206-2Z/C3	NDE: 6206-2Z/C3
Vibration	1.6 mm/sec	Direction of Rotation	CW or CCW
Moment of inertia (kg.m ²)	0.0051	Sound Pressure Level	82 dB(A)
Final Colour	RAL-7031 : BLUE GREY	Paint Specification	2 Pack Epoxy
Terminal Box Position	TOP/SIDE	Weight	24 kg

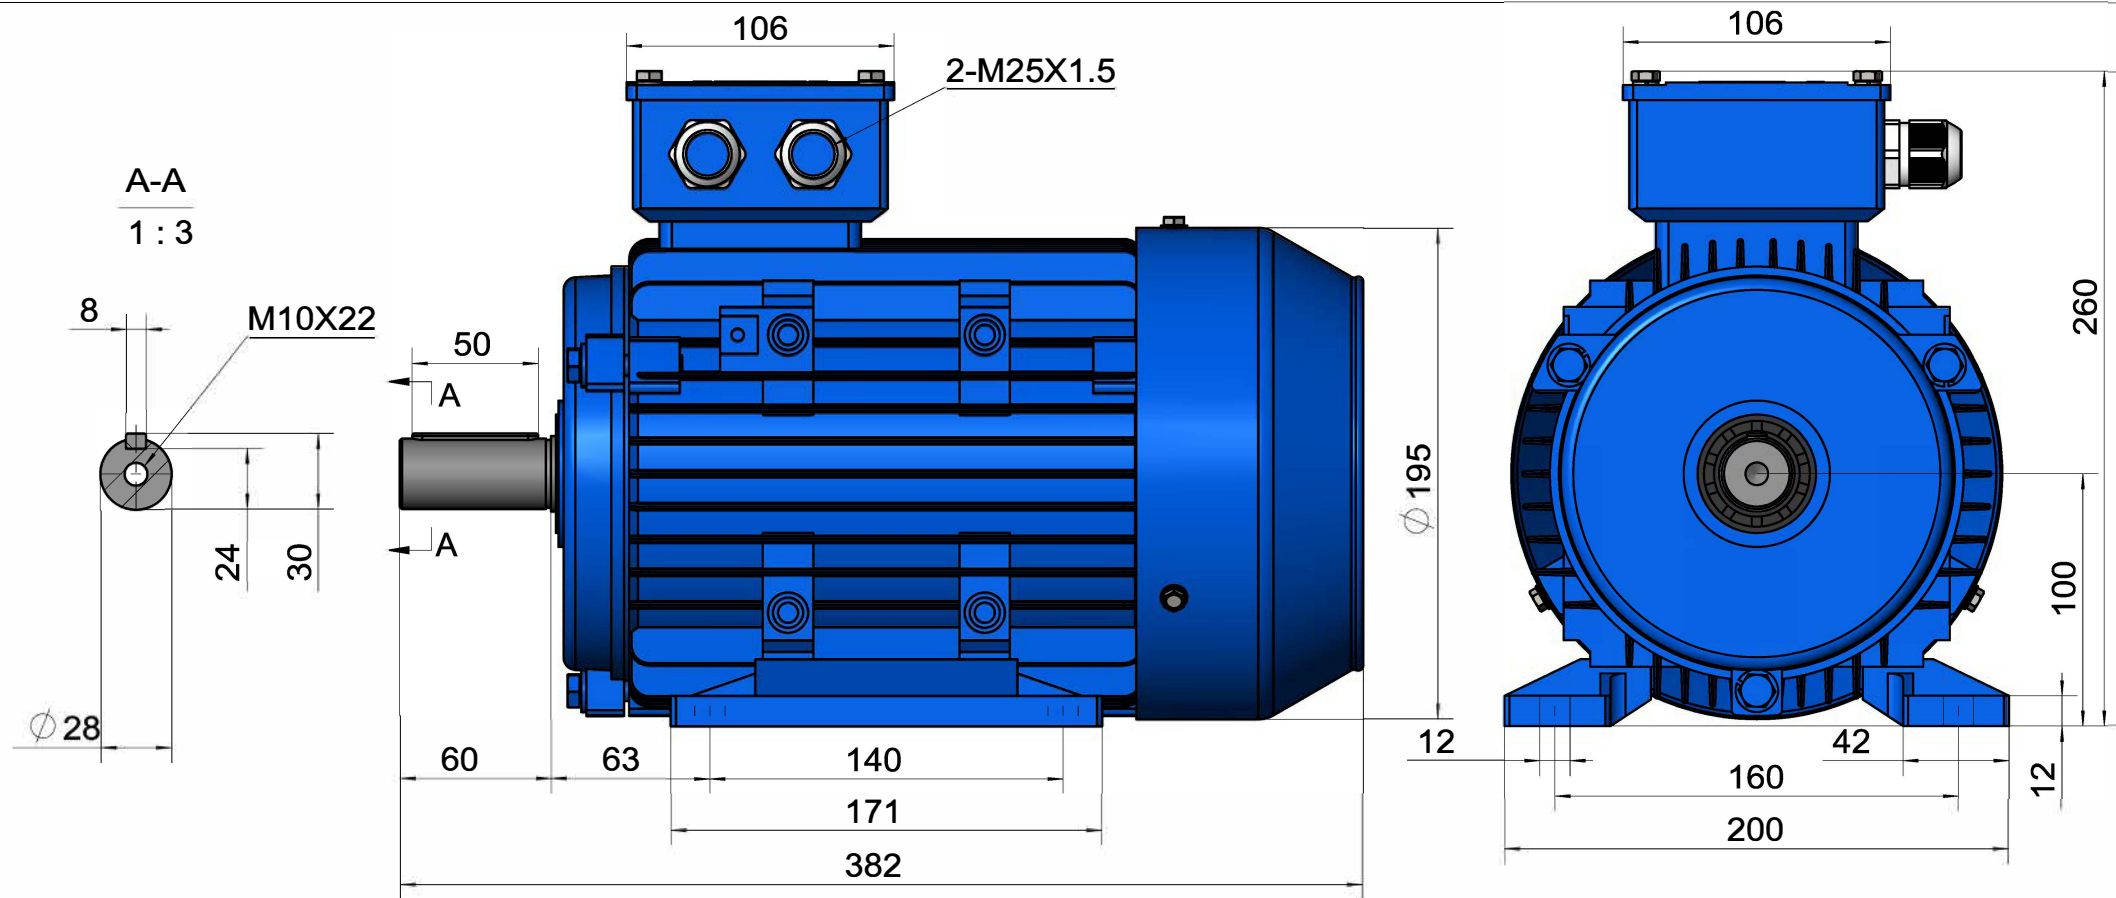

100L-B3
Mounting diagram



OMEC NORTH AMERICA INC.

Performance Curves

kW: 3 RPM: 2880

IE3 GENERAL PURPOSE MOTORS- **OMT** 400V 50Hz

